

KELLY RYAN 12' BAGGER




Benefits

- Affordable • Easy to operate
- Bag big quantities in small areas
- Tongue centered for close bag spacing and road travel
- Wheels and tongue rotate to travel position

Standard Features

- 100" rotor with 92 packing bars with tine caps
 - Patented "Centerline" Raised Rotor
 - Puts up to 15% more in the bag than bottom-pack units
 - Packs more punch from the center, with less H.P., for tighter, more uniform bags of feed
- Higher quality feed due to more even packing
- One-man bag lift-loader
- Self-cleaning tunnel (**no need for tunnel clean out**)
- 14" cable drums with single-wrap cables for up to 200 ft. bag
- 2" diameter cable drum shaft
- U. S. made RC-160 roller chain drive running in an oil bath
- 3-7/16" bore-tapered TIMKEN roller bearing on drive and idler end
- Dual mechanical brake calipers
- Bag lift with cradle
- #662 conveyor chain
- Hydraulic cable rewind
- 1/4" double endplate which prevents silage juice from reaching the main rotor bearing
- Remote grease bank for all rotor bearings
- 250-415 ton capacity
- New radial ribbed implement recap tires (P235/R16)

**The 12-foot Centerline is easy to operate and it's affordable, even with the current milk prices.*

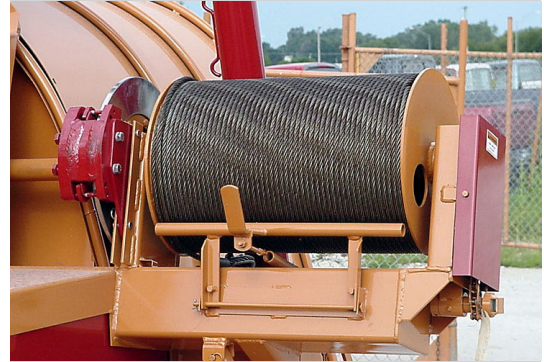

Standard Equipment

- Rust-free chrome disc mechanical brake
 - No matter how much the temperature changes, the mechanical brake keeps the tension consistent throughout the bagging process
- Bondioli 2201 Gearbox
 - 540 rpm, 1000 rpm PTO
 - Same gearbox as Centerline Pro, rated at 150 horsepower



Optional Features

- Hydraulic brake with hand pump and gauge